

产品规格书

客户名称/Customer		规格书编号/ Sample No.	
品名/Part Name	COMMON CHOKE	客户编号/ Customer No.	
料号/Part No.	CW2012 Series	客户料号/ Customer P/N	SDCW2012-2-900TF

产品型号

PRODUCT IDENTIFICATION

CW 2012 - 900 T F
 ① ② ③ ④ ⑤

①系列号 Series Code

④包装方式 Packing: T 编带 Tape

②尺寸 Size



B 散装 Bulk

③阻抗 Impedance

⑤环保产品 Lead Free

外观尺寸

SHAPE AND DIMENSIONS

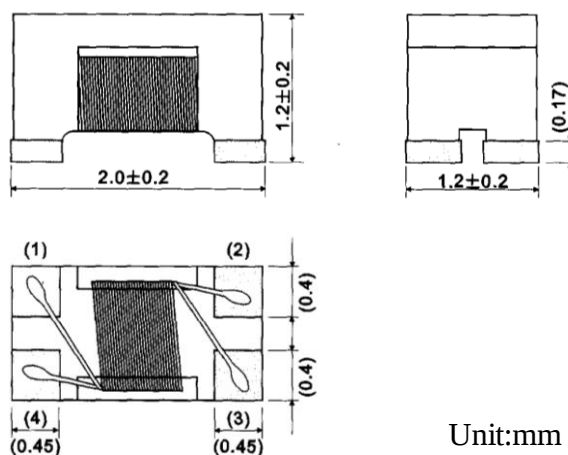

Unit:mm


规格特性

SPECIFICATIONS

Part No.	Impedance @100MHz (Ω)	Insulation Resistance (MΩ)Min	RDC (Ω) (max)	Rated Voltage (Vdc)	Rated Current (mA) Max
CW2012-670	67±25%	10	0.25	50	330
CW2012-900	90±25%	10	0.35	50	330
CW2012-121	120±25%	10	0.30	50	330
CW2012-181	180±25%	10	0.35	50	330
CW2012-261	260±25%	10	0.40	50	330
CW2012-371	370±25%	10	0.45	50	330


等效电路

EQUIVALENT CIRCUIT

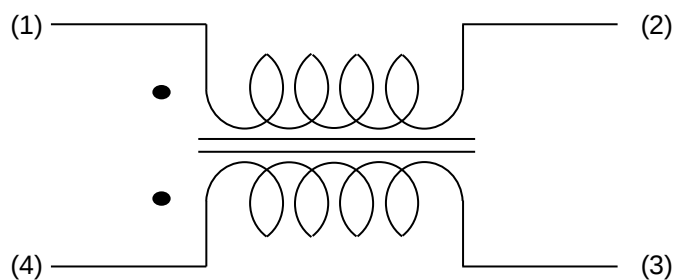

电气特性

TYPICAL ELECTRICAL CHARACTERISTICS

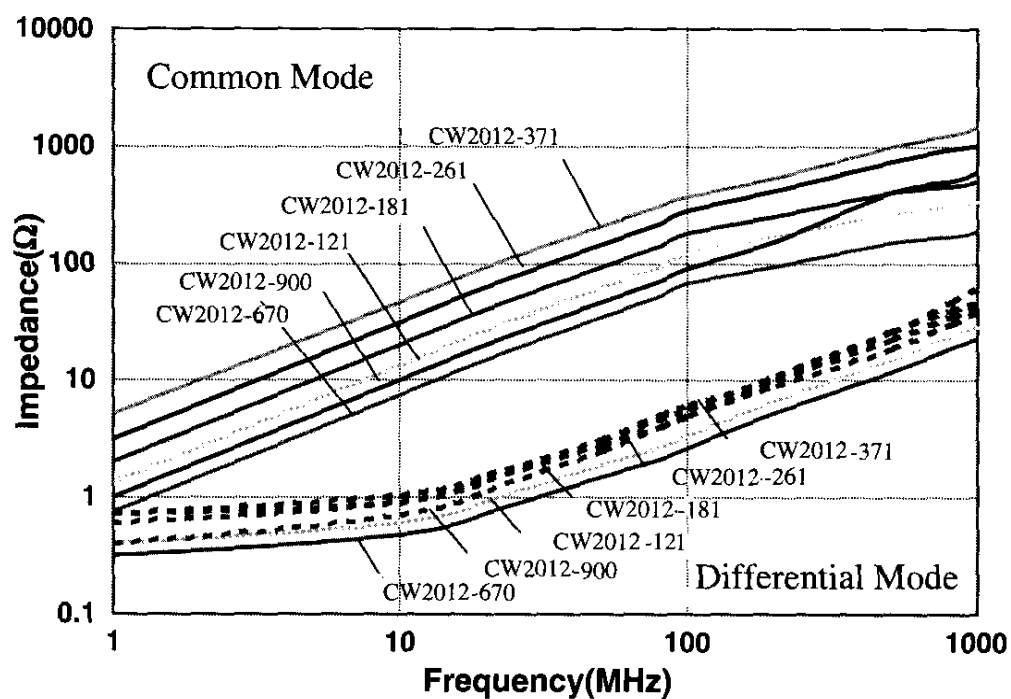

共模扼流器--CW系列

Common Mode Choke Coil- CW Series

工作温度 Operating Temp : -40~+85℃

用途 Applications : USB、1394、LVDS


产品型号

PRODUCT IDENTIFICATION

<u>CW</u>	<u>3216</u>	-	<u>900</u>	<u>T</u>	<u>F</u>
①	②		③	④	⑤
①系列号 Series Code	②尺寸 Size		③阻抗 Impedance	④包装方式 Packing: T 编带 Tape B 散装 Bulk	⑤环保产品 Lead Free

外观尺寸

SHAPE AND DIMENSIONS

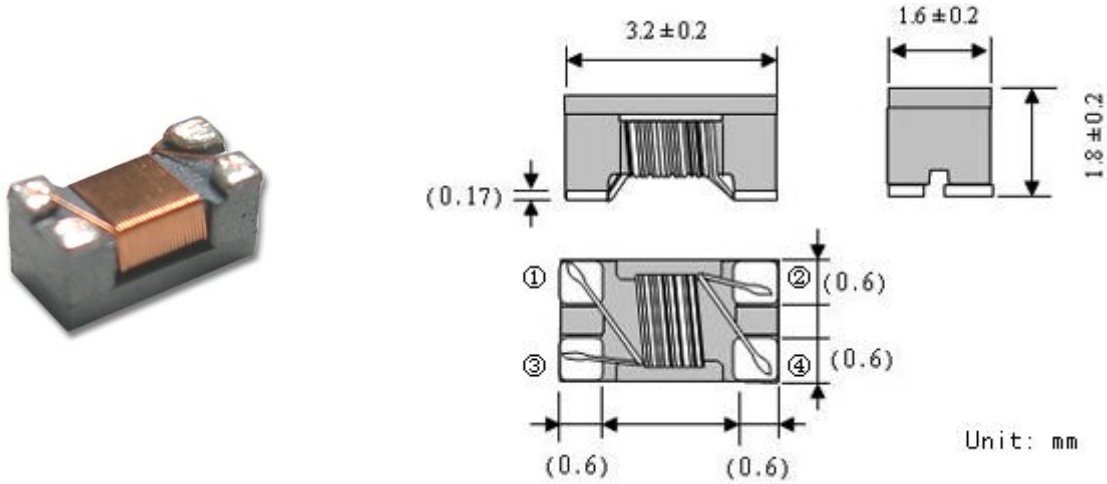


规格特性

SPECIFICATIONS

Part No.	Impedance @100MHz (Ω)	Insulation Resistance (MΩ)Min	RDC (Ω) (max)	Rated Voltage (Vdc)	Rated Current (mA) Max
CW3216-900	90 ± 25%	10	0.30	50	400
CW3216-161	160 ± 25%	10	0.35	50	350
CW3216-221	220 ± 25%	10	0.40	50	350
CW3216-261	260 ± 25%	10	0.50	50	300
CW3216-361	360 ± 25%	10	0.55	50	300
CW3216-601	600 ± 25%	10	0.75	50	300
CW3216-102	1000 ± 25%	10	1.00	50	250
CW3216-222	2200 ± 25%	10	1.20	50	200

等效电路

EQUIVALENT CIRCUIT

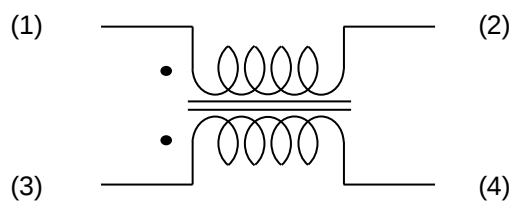

电气特性

TYPICAL ELECTRICAL CHARACTERISTICS

